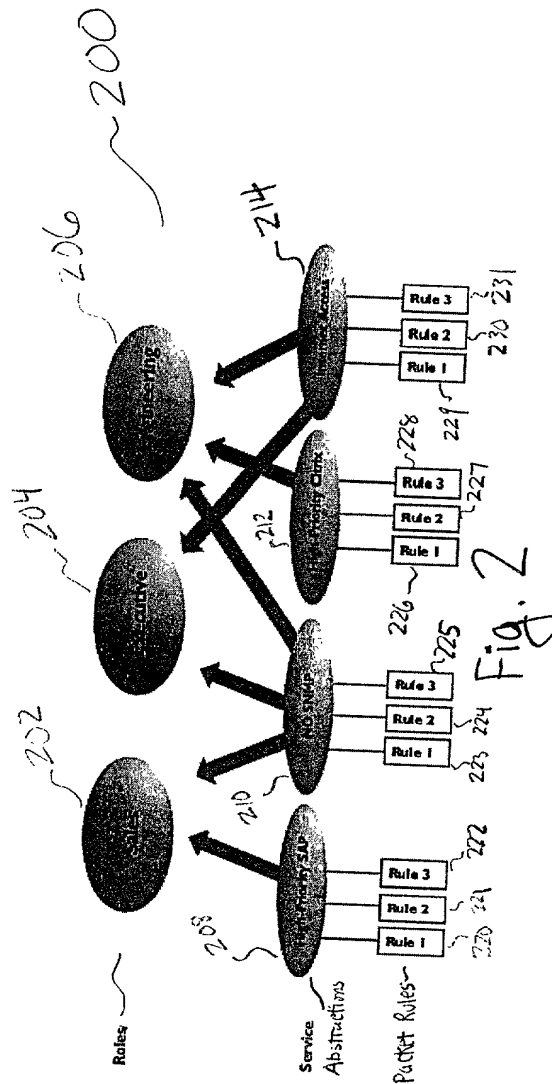


FIG. 1



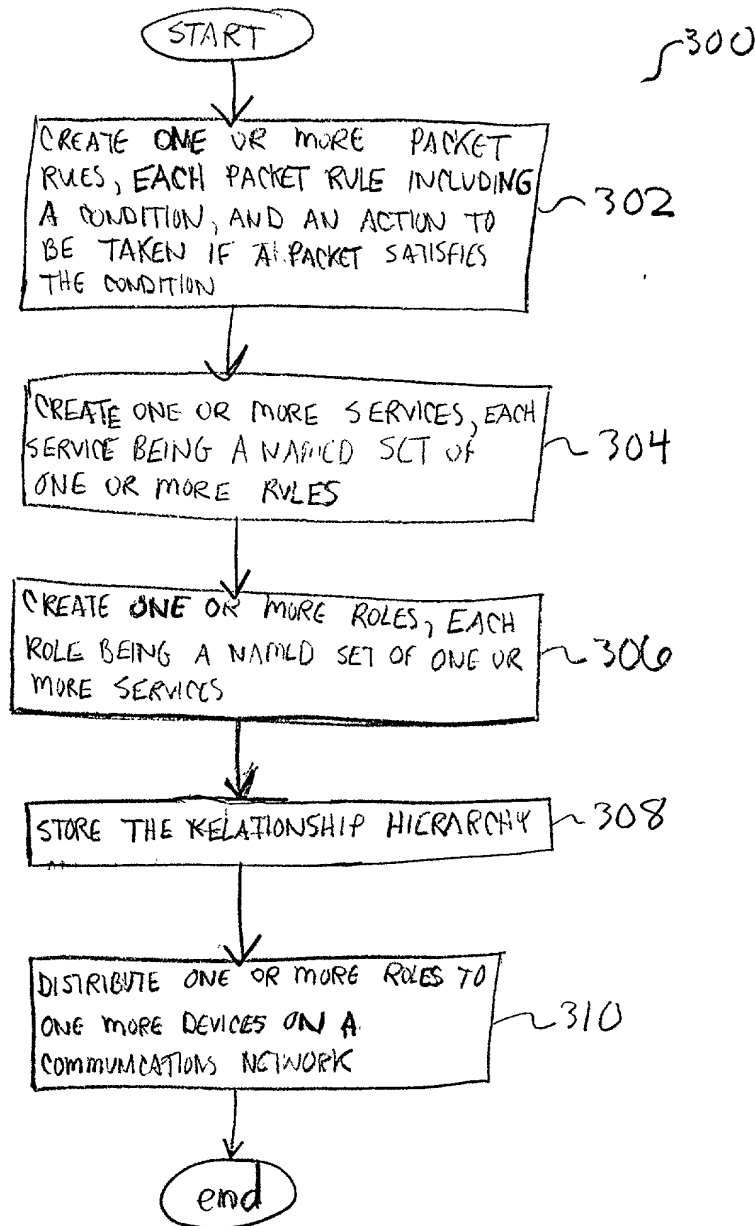


FIG. 3

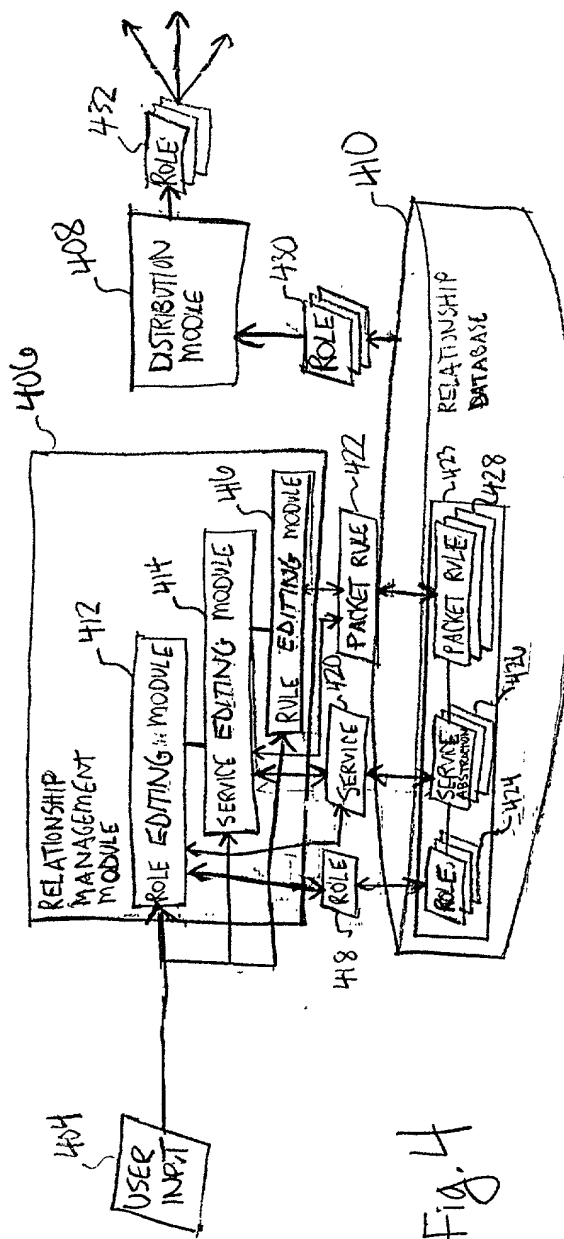


Fig. 4

Name	Status	Type	Value	Mask	VLAN	Priority	Deny?	Rate Limit	Layer
Contain subnet 54	Enabled	IP Address Bilateral	10.20.54.0	255.255.255.0	55	7	No	None	3

Name	Rule 1	Rule 2	Rule 3	Rule 4
Contain IP Eng Subnet Traffic	contain subnet 54	contain subnet 55	contain subnet 56	contain subnet 57

Fig. 6

Name	Default VLAN	Default Priority	Service 1	Service 2	Service 3
Engineering	5	None	Contain DHCP	Contain ICMP	Contain IP Eng Subnet Traffic
...					

704 { 706 { 708 { 710 { 712 { 714 { }
700 ~~~~~ 702

10071873, 000005

Edit Rule

Layer:
Traffic Classification Layer:
Layer 3 Network

Type:
Traffic Classification Type:
IP Address Bilateral

Value:
IP Address Bilateral
Enter a valid IP Address in the text box below.
Select a mask from the choice box below.

Value: 10.20.54.0
Mask: 255.255.255.0

OK
Apply
Cancel
Help

Fig. 8

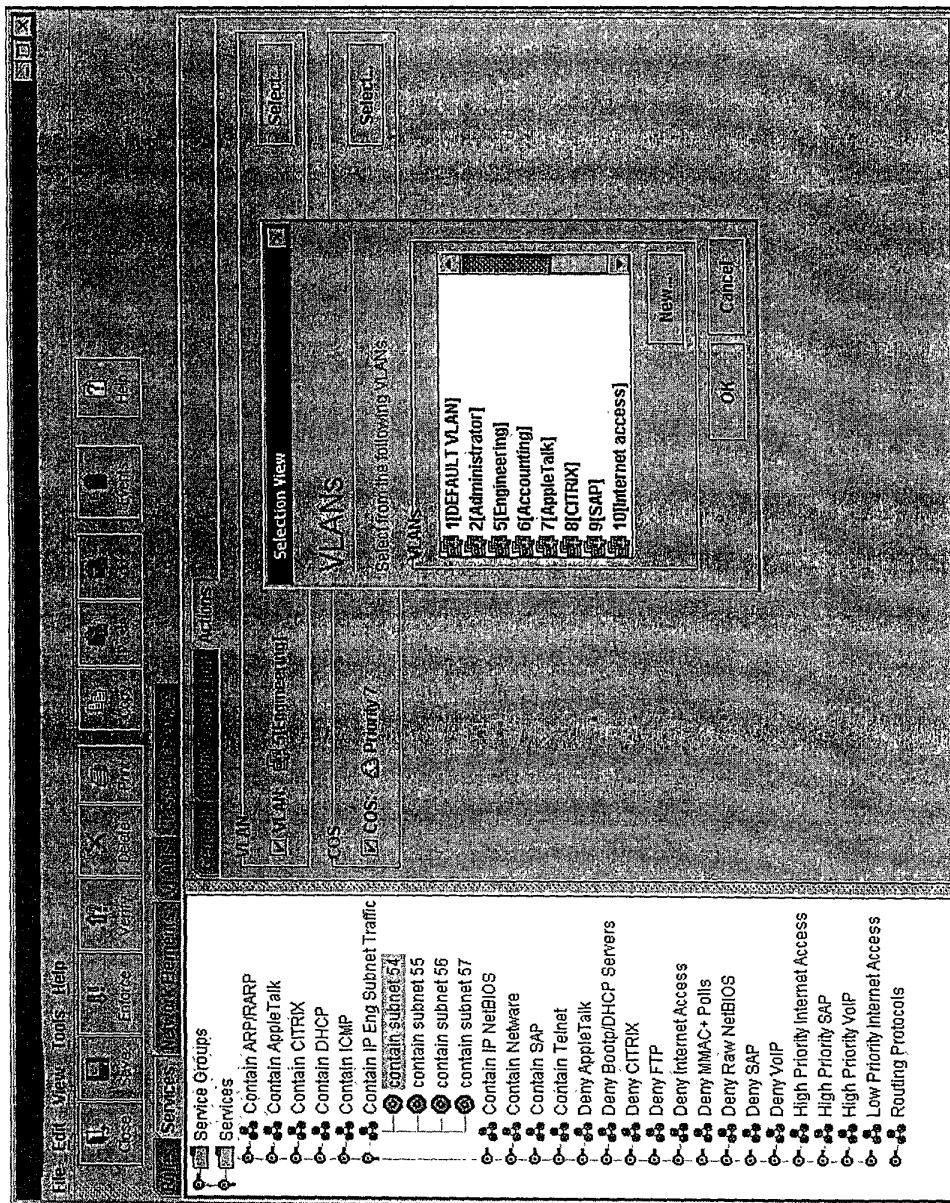



Fig. 9.



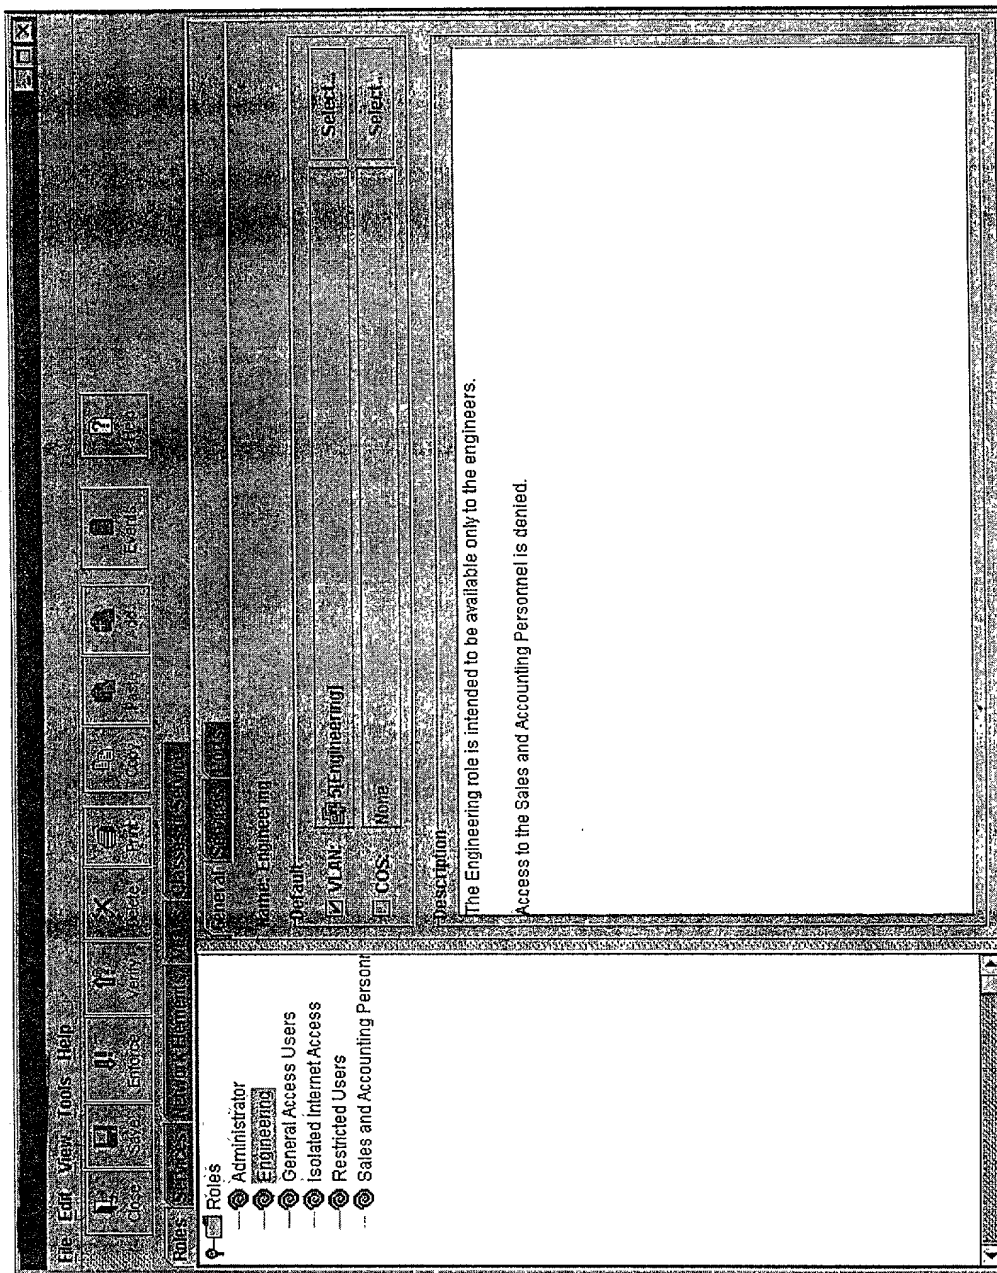


Fig. 11

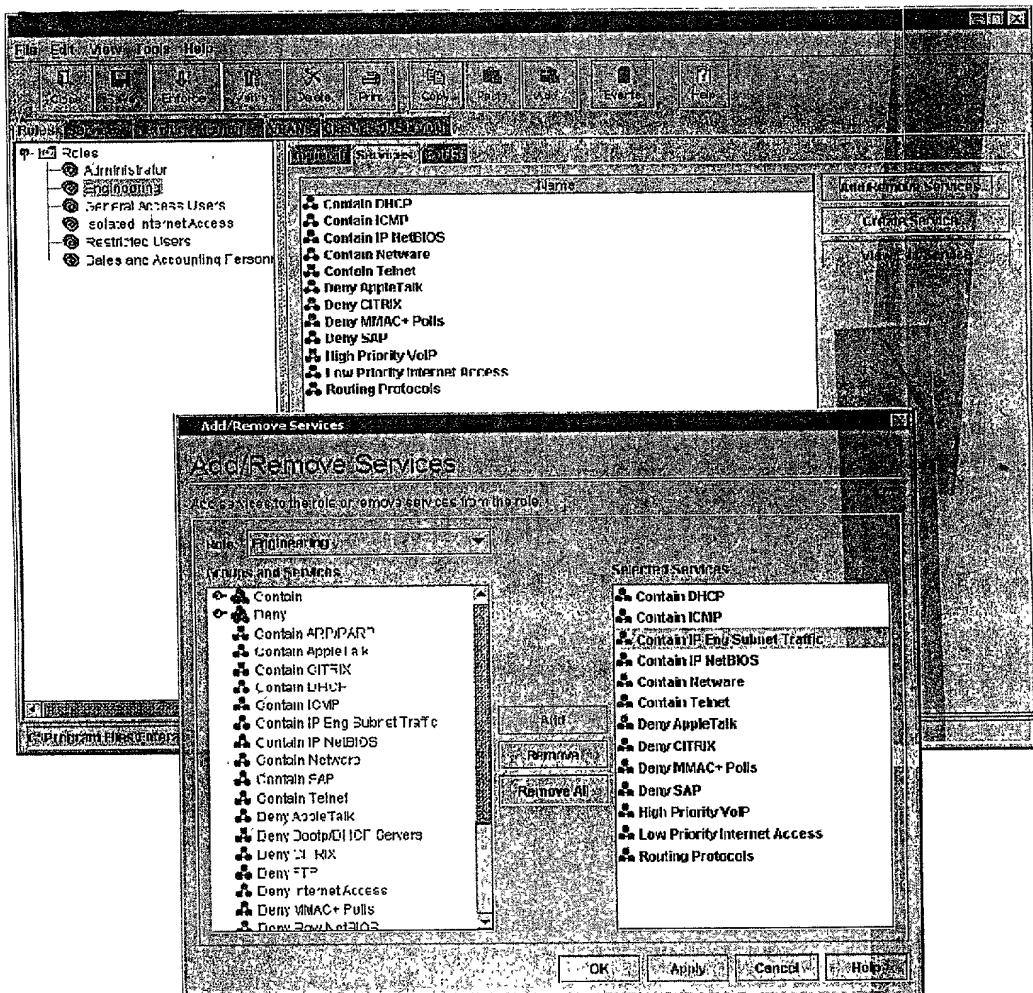
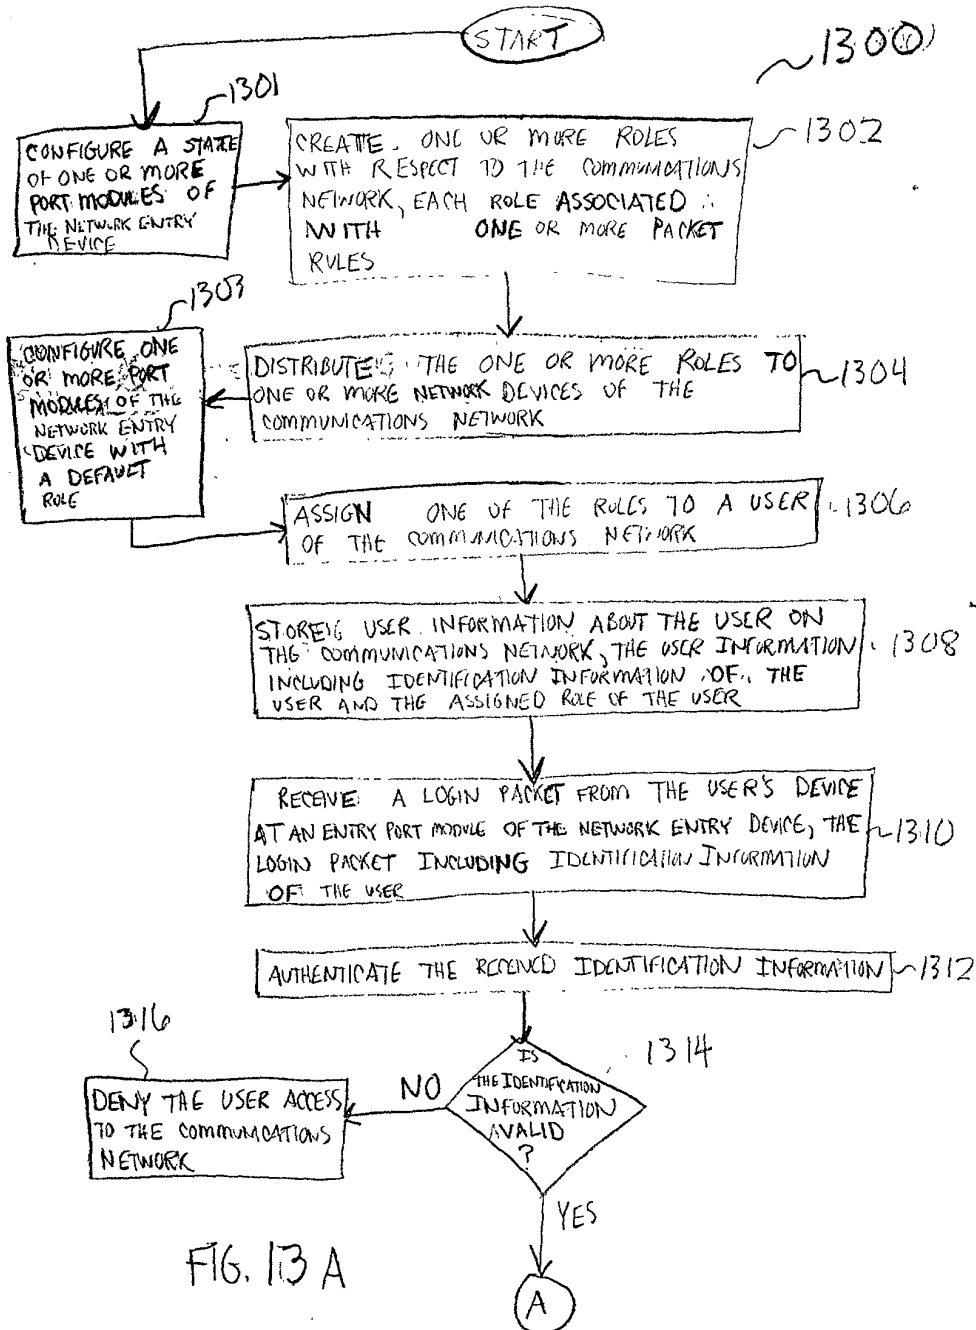
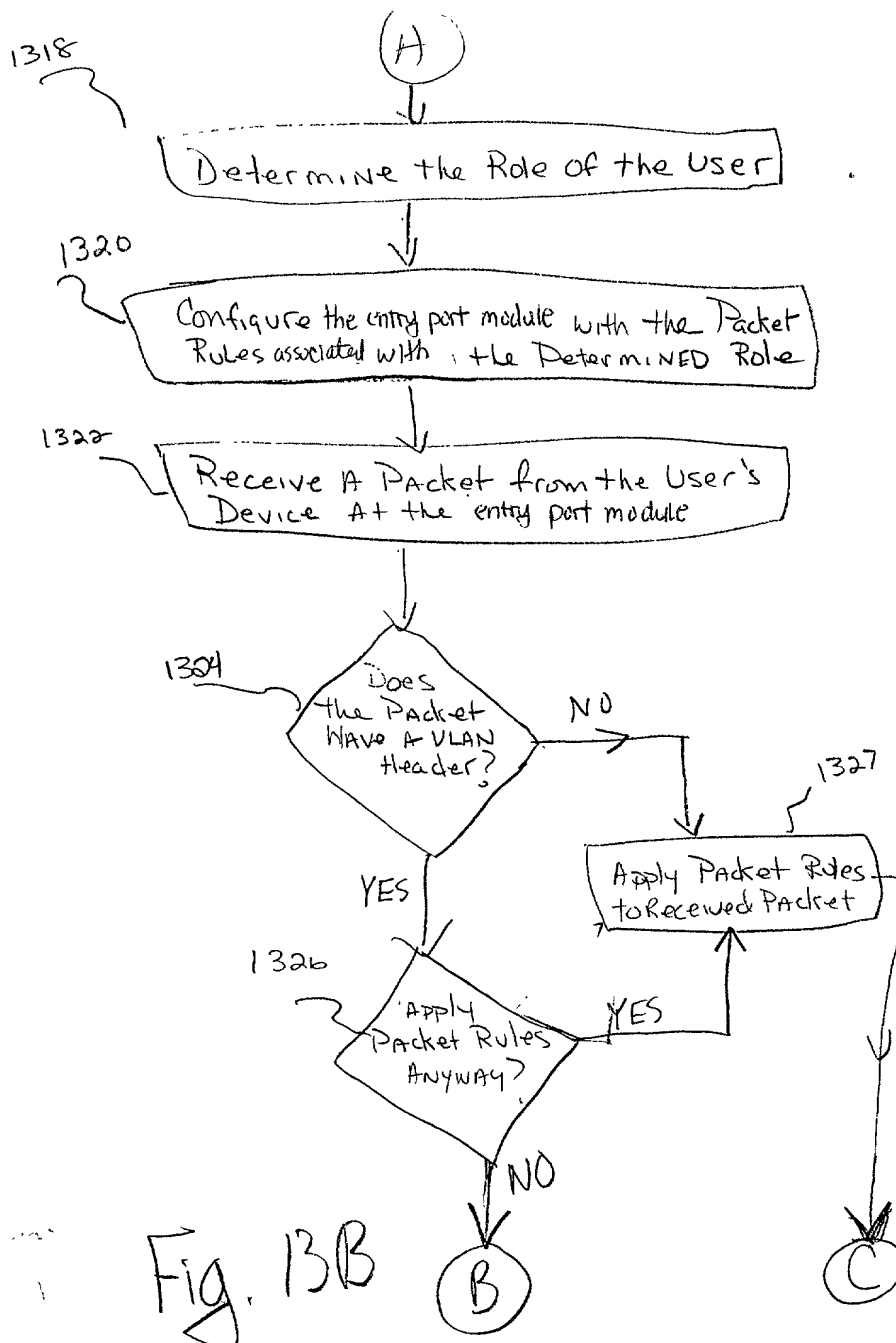


Fig. 12





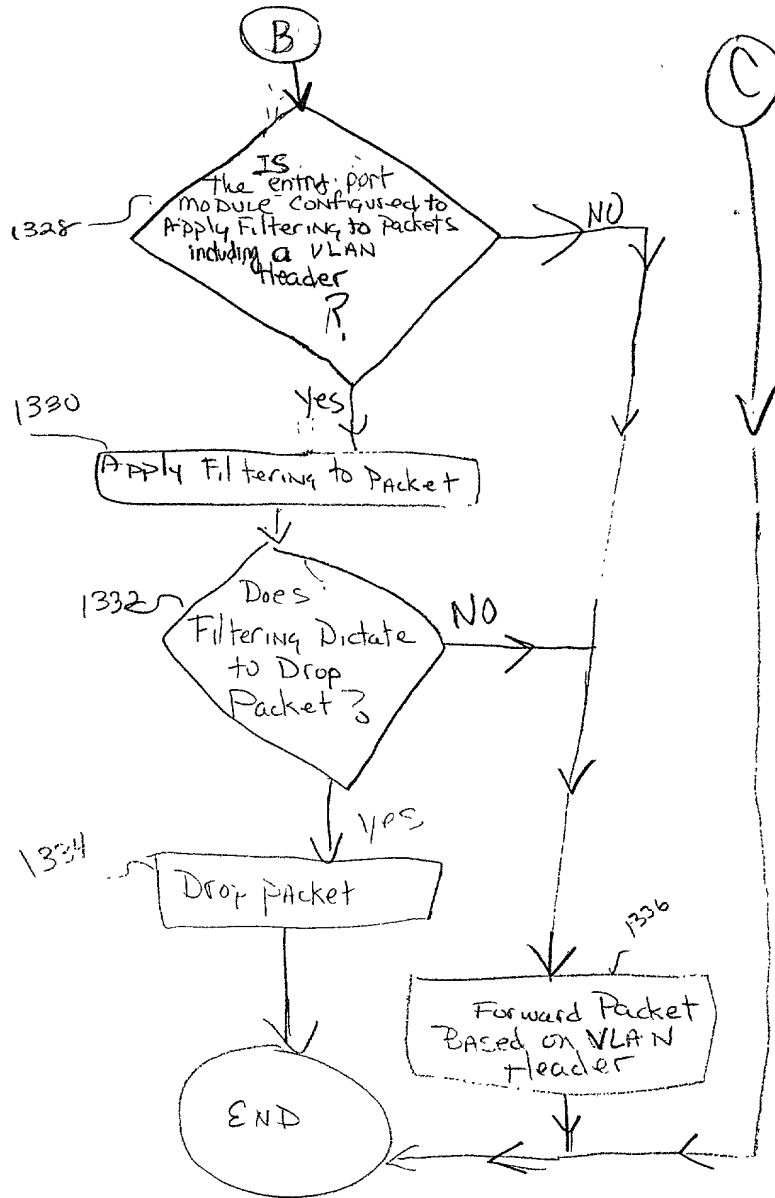
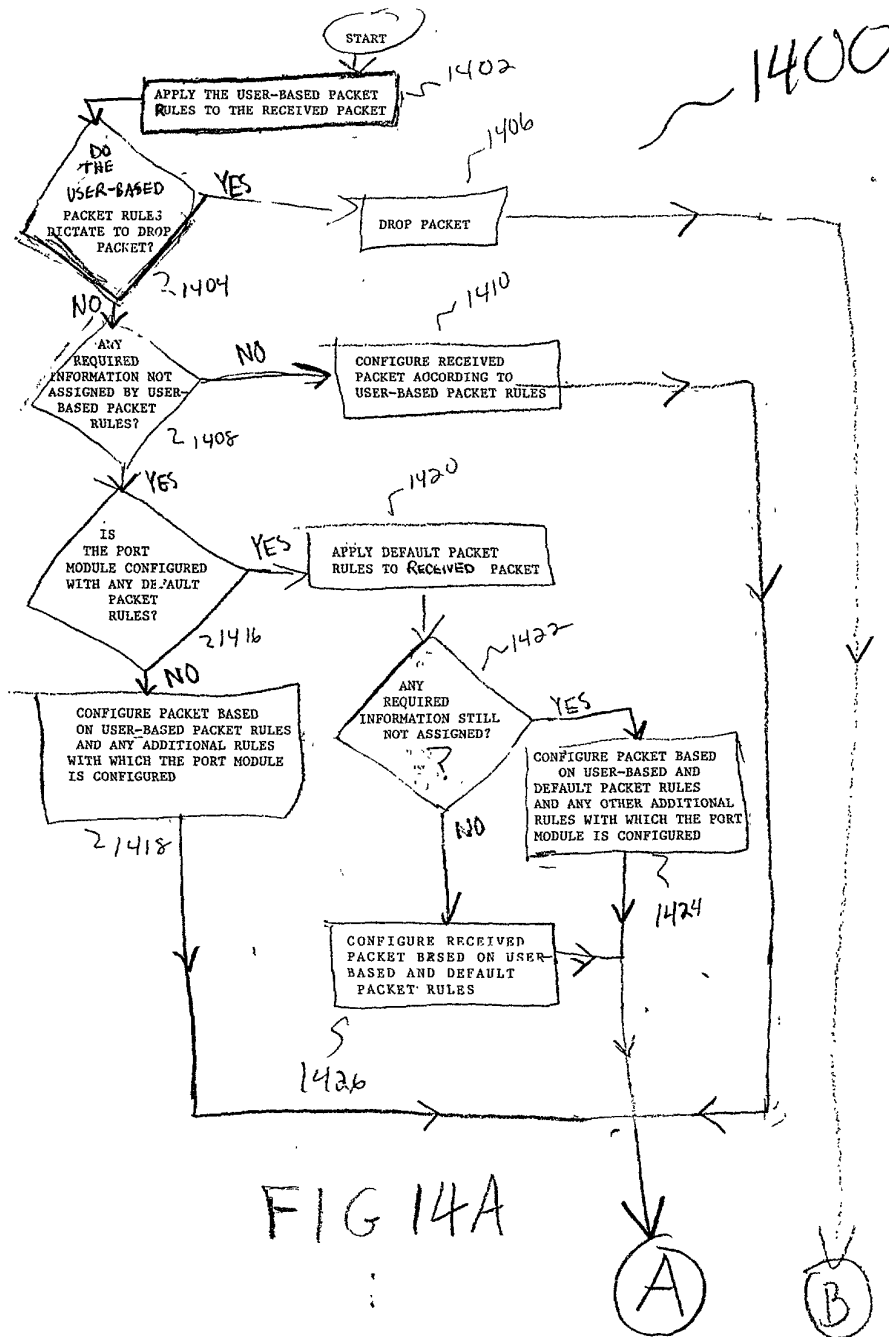


Fig. 13C



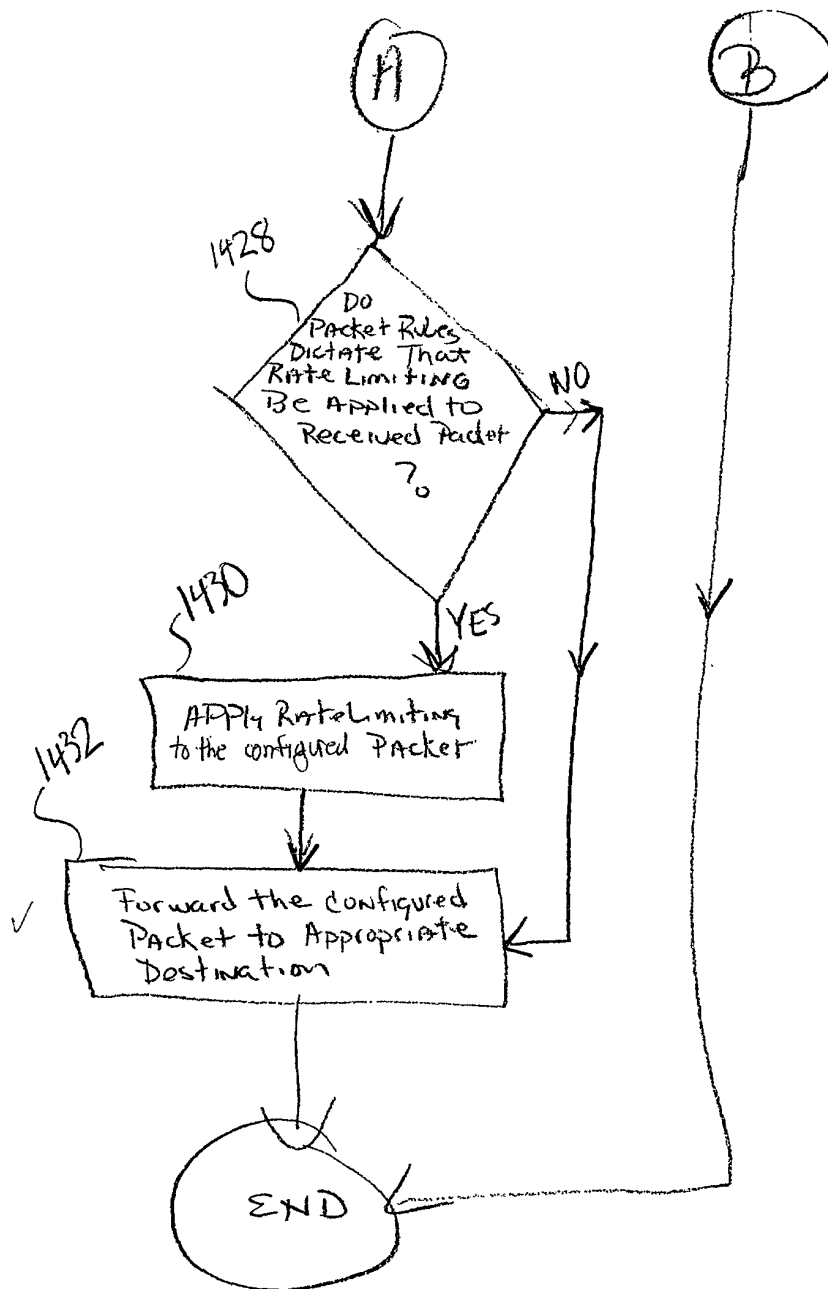


FIG. 14 B

1500

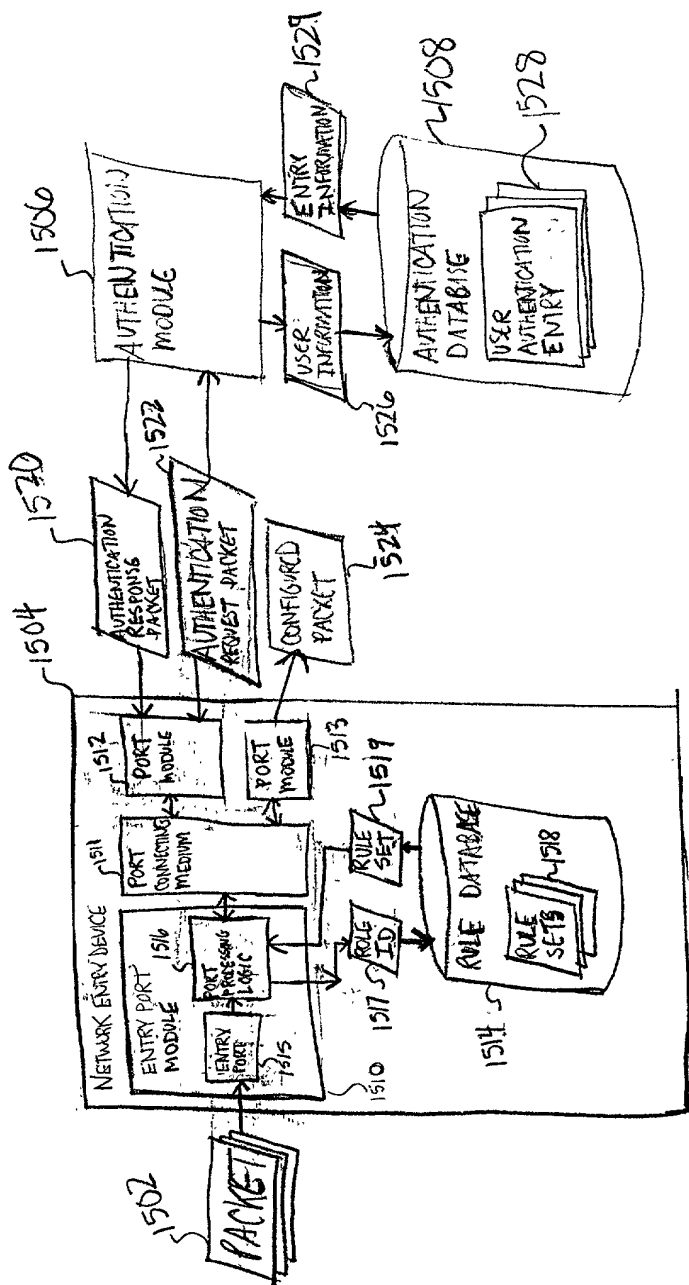


FIG. 15